



CL-CIN03



Smart controller



Product feature



- » **WIFI APP control, RGB three-color changed and brightness adjustment, change CCT and music control function; timing function; gradual change function; circadian rhythm; camera color; APP control ;**
- » **The connection gateway can control the distance without restrictions;**
- » **It can be controlled by WIFI APP group, no limited the member, remote control as well.**
- » **It can be controlled for each group;**



CL-CIN03-Parameters

Item.NO	Input Voltage	Power	Current:	Connection	Working temperature	Dimension (mm)
CL-CIN03-01	12~24Vdc	Max. 96W	2A*5CH Max.4A	WIFI	-20°C~45°C	58×23×10
CL-CIN03-02	12~24Vdc	Max. 96W	2A*4CH Max.4A	WIFI	-20°C~45°C	58×23×10
CL-CIN03-03	12~24Vdc	Max. 96W	2A*4CH Max.4A	WIFI	-20°C~45°C	58×23×10
CL-CIN03-04	12~24Vdc	Max. 96W	2A*3CH Max.4A	WIFI	-20°C~45°C	58×23×10
CL-CIN03-05	12~24Vdc	Max. 96W	2A*2CH Max.4A	WIFI	-20°C~45°C	58×23×10
CL-CIN03-06	12~24Vdc	Max. 96W	2A*2CH Max.4A	WIFI	-20°C~45°C	58×23×10





Connection

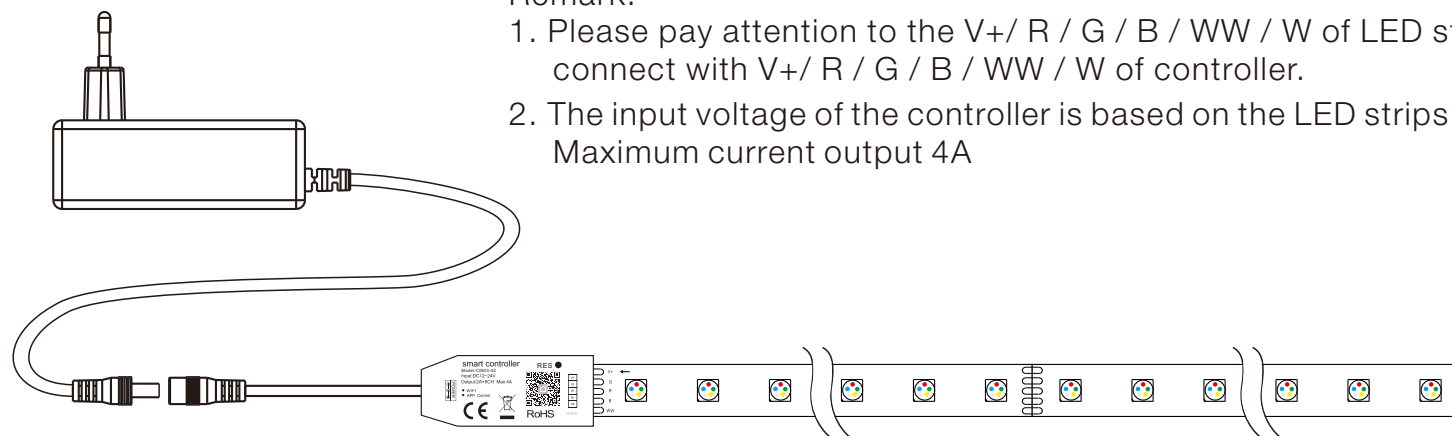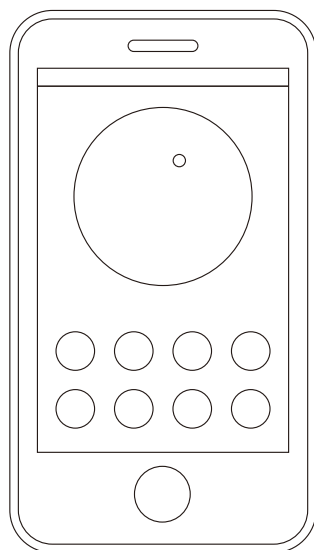

Remark:

1. Please pay attention to the V+ / R / G / B / WW / W of LED strips connect with V+ / R / G / B / WW / W of controller.
2. The input voltage of the controller is based on the LED strips voltage, Maximum current output 4A

Connection

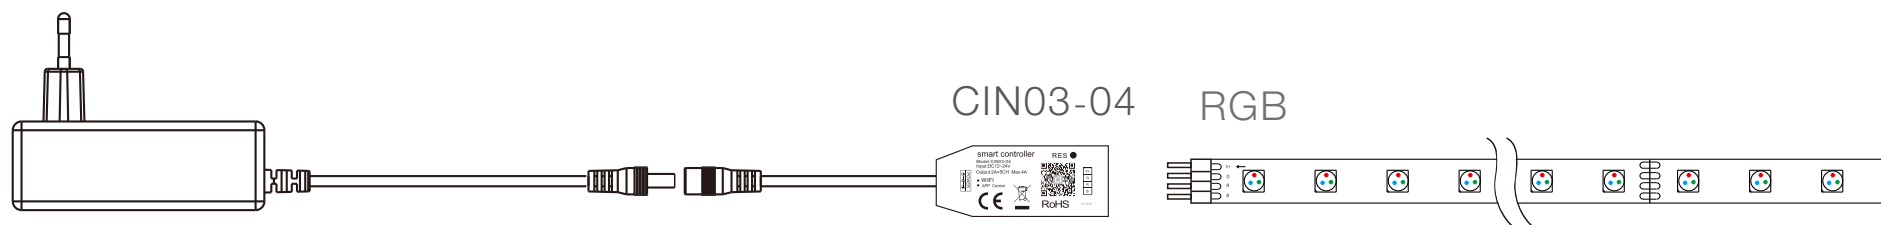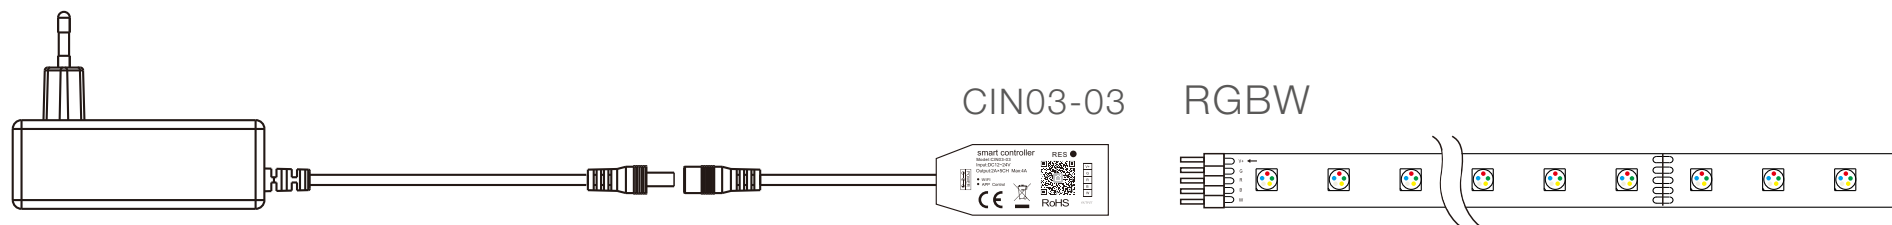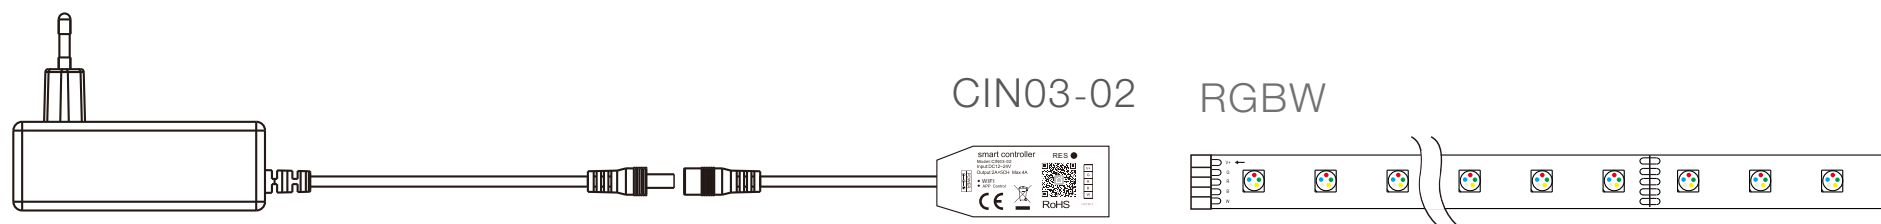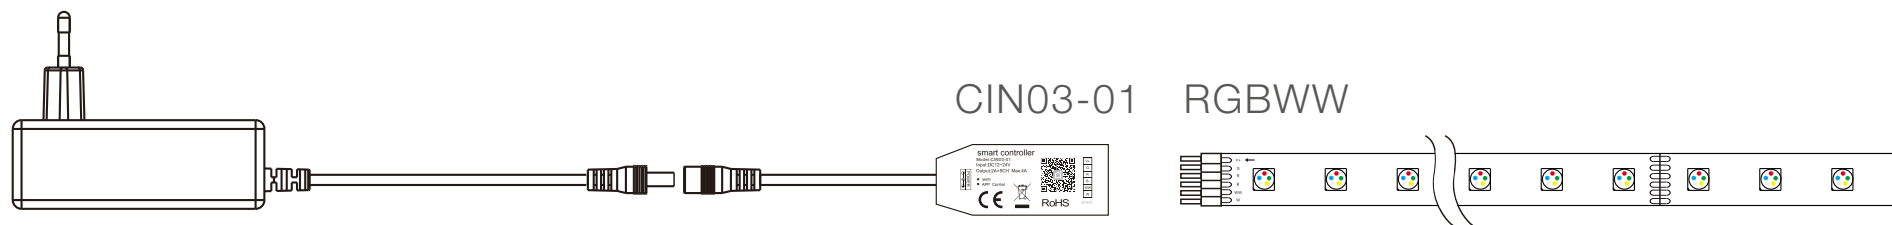

Connection

